### AMANO McGANN. PARKING SOLUTIONS




## **Access Terminal**



Amano McGann Proximity readers ensure fast and convenient parking access and egress with up to a 10-inch read range standard. Cards may be presented to the reader at any angle while maintaining speed and accuracy. Non-contact proximity antenna operates reliably indoors or out with minimal maintenance. Audio/visual indicators provide active feedback to patron when a card is presented. Used with Amano McGann Software, these readers are ideal for monthly contract, temporary, visitor, hotel, valet, debit, and credit card on-file applications.

# Reader PROXIMITY

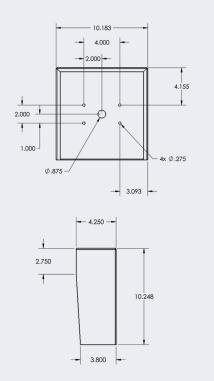

#### FEATURES

- Micro-controller technology
- 1000 transaction off-line buffer
- Real-time clock with battery backup
- Up to 10" read range Extended range option available
  - Automatic switching to stand-alone mode if < communications are interrupted
  - Built-in diagnostics reports reader performance
- Remote control of gates and peripheral device from Amano McGann Software  $\blacktriangleleft$ 
  - Hard, soft, true or timed anti-passback <
  - Audible tone and visual LED card read indicator <
  - Proprietary-encoding format restricts badge counterfeiting 
    Optional formats available wiegand and custom
  - Reader can accommodate 65,000 to 1 million card IDs based on format
    - Optional 2-line (40 character) LCD display w/LED backlight
      - Optional Intercom <

#### STANDARD CONFIGURATION

PROXIMITY
☐ Amano McGann Format (Indala) ☐ Amano McGann Format (HID)
CONTROLLER BOX
☐ Standard Gate Mount
CUSTOM OPTIONS
PROXIMITY CUSTOM FORMAT/TYPE
☐ Indala-S ☐ Indala-M ☐ Indala-E ☐ HID-S ☐ HID-M ☐ HID-E ☐ Other
DISPLAY OPTION
☐ Standard Display: 2-Line/40 Character 3.2"W x .7"H (Character Size .13"W x .22"H)
Large Display: 2-Line/40 Character 5.5"W x .75"H (Character Size .24"W x .38"H)
INTERCOM OPTION
☐ Std. Intercom Speaker/Button ☐ Custom Dial-up ☐ Custom
FIRMWARE
☐ Standard ☐ Custom
ENCLOSURE
☐ 10x10 Ped. Mtd. ☐ Custom
ENCLOSURE COLOR
☐ White ☐ Silver ☐ Custom
ENCLOSURE GRAPHICS
☐ Standard ☐ Custom
SYSTEM CODE
☐ New ☐ Existing System Match
SPECIFICATIONS
DIMENSIONS Antenna: 6 1/8"L x 5 1/8"H x 1 1/2"D
Gate Mtd. Controller Box: 8 3/4"L x 5 1/4"H x 2 1/4"D
WEIGHT
Antenna: 1 lb. (approx) Controller box: 2 lbs (approx)
POWER
120 VAC (12 VAC 800mA) power supply Optional heater supply
MOUNTING
Antenna: pedestal or wall mount  Controller: gate or enclosure mount
OPERATING TEMPERATURE
-20° to 140°F/-30° to 60°C
HUMIDITY
95% non-condensing
ANTENNA FINISH
Black polycarbonate housing
READER TECHNOLOGY
Proximity
ANTENNA READ RANGE

Specifications are approximate and are subject to change without notice.

REPRESENTED BY:

# **AMANO McGANN**<sub>®</sub>

Standard: up to 10" Optional: 4" to 24"

Corporate Headquarters 651 Taft Street NE, Minneapolis, MN 55413 Tel: (612) 331-2020 www.amanomcgann.com